

DSC 4-WAY SWITCH DALI



DSC – 4-way DALI Switch

INTRODUCTION

The DSC is an addressable DALI-compatible 4-way switch.


FUNCTION

- Addressable
- Switch with four programmable push buttons.
- Each input can be assigned two functions by making a quick or longer press.
- Commonly used to achieve the following functions:
 - Go to max
 - Turn off
 - Dim up/down
- Can also be used to access pre-programmed scene selections.

INSTALLATION

The DSC is intended for wall mounting and junction boxes.

DIMENSIONS

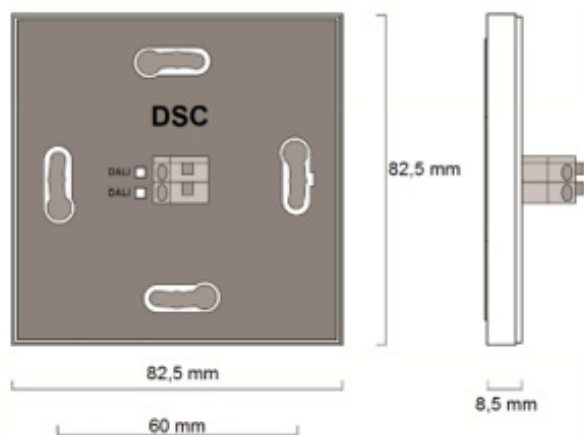

TECHNICAL SPECIFICATIONS

General

Voltage supply: Via DALI bus line

Nominal current consumption: 1.5 mA

Input: 4 programmable push buttons

Output: DALI

Ambient temperature: -10 – 50 °C


Enclosure rating: IP20

Cable area: up to 2.5 mm²

Power Supply

Powered via the connected DALI loop.

CONNECTIONS

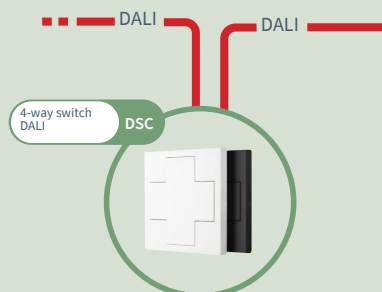

Connection diagram

ADDITIONAL PRODUCT DOCUMENTATION

For additional documentation, refer to the product page for Lighting Control SBDb at www.lindinvent.com

Document	Comment
Installation Instructions	See dimensions and installation details in this product description.
Commissioning Instructions	Refer to the commissioning instructions for the SBDb control unit.
Maintenance Instructions	Considered maintenance-free.
External Connection Diagram	See the terminal connection illustration in this product description.
Environmental Product Declaration	For assessment at Byggvarubedömningen in Sweden.
AMA Text	See lighting control unit SBDb.