

PFS20S – Transformer [Plug, 230/24 VAC]

1-phase safety isolating transformer


type **PFS 20S**



Safety isolating transformer for general use.

Primary:	230V	50-60 Hz
Secondary:	23,3V	
Nominal load:	20 VA	
Weight:	0,52 kg	
Protection:	IP33	
Design:	Transformer in a grey self expiring plastic enclosure. Double insulation (no earth needed). Primary is performed to fit a socketoutlet (SCHUKO). Secondary outlet 2-pole AMP. Secondary PTC.	
Mounting:	Socket	
Standard:	Safety	EN 61 558-1; EN 61 558-2-6
	Emission	EN 55 014-1; EN 61 000-3-2 / 3-3
	Immunity	EN 55 014-2

All dimensiones in mm.

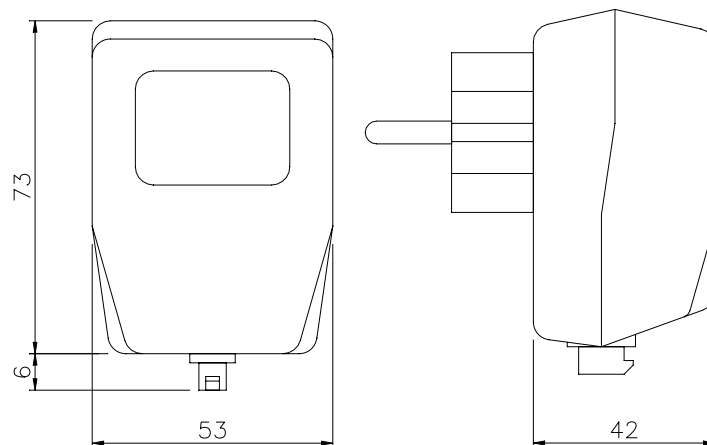

If IP class higer then IP 30 is required secondary outlet must be mounted straight down